
Apex Dura 25/33/42/50W Wattage Switchable LED CCT V2 Anti-Corrosive 5ft Batten

Part Code: 10276V2

The Apex CCT LED Batten range is a versatile lighting solution designed to simplify specification, installation, and maintenance. Featuring selectable colour temperatures, Apex provides the flexibility to adapt to a wide range of commercial and industrial environments. A universal accessory system across the range reduces stock requirements, simplifying ordering, and enabling faster installations.



- A stock friendly solution for wholesalers and contractors alike
- Perfect for all commercial environments
- Suitable for BESA Box mounting
- Repositionable thermal blocks
- Tool-free termination

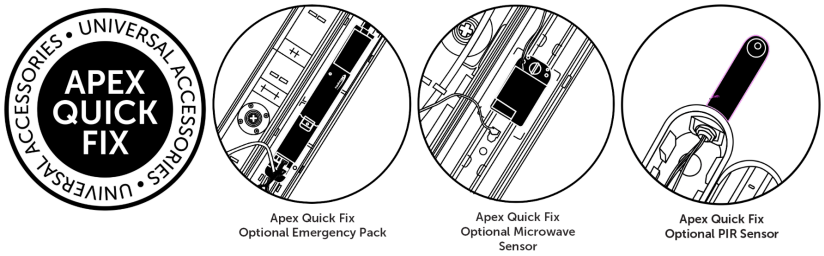



Email: technical@belllighting.co.uk
Telephone: 01924 893380
www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

BELLlighting

Apex



Product Category	Fittings / Fittings
Application	LED Batten
Product Warranty	8 Years (2 Years On Site)
EAN	5013588002811
Commodity Code	9405423100
Country of Origin	CN

Technical Specification	
Wattage (W)	25/33/42/50
Volts (V)	220/240
Colour Temperature (K)	3000/4000/6000
Lumen Output (lm)	25W = 3840 (3000K) / 4077 (4000K) / 3892 (6000K) - 33W = 4921 (3000K) / 5354 (4000K) / 5186 (6000K) - 42W = 6211 (3000K) / 6795 (4000K) / 6426 (6000K) - 50W = 7081 (3000K) / 8029 (4000K) / 7586 (6000K)
Lumens per Watt (lm/W)	142-163
CRI (ra)	80
Frequency (Hz)	50/60
LED Drive Current	90mA
Energy Consumption (kWh/1000h)	50
Life Hours	70000
Switching Cycles	100000
IK Rating	IK10
IP Rating	IP66
Height (mm)	78
Operating Temperature	-20°C - +35°C
Width (mm)	96
Length (mm)	1570
Lumen Maintenance Ratio	L80 B10
Individual Product Weight (kg)	1.7

Packaging Information	
Minimum Order Quantity	1
Single Box Weight (kg)	1.9
Single Box Height (mm)	83
Single Box Width (mm)	100
Single Box Depth (mm)	1575
Single Box Volume	0.0130725
Outer Box Qty	6
Outer Box Barcode	10276V2000006
Outer Box Weight (kg)	12.7
Outer Box Height (mm)	180
Outer Box Width (mm)	315
Outer Box Depth (mm)	1590
Outer Box Volume	0.090153
UNSPSC Code	39111544

Email: technical@belllighting.co.uk
Telephone: 01924 893380

www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Construction	
Primary Material	Polycarbonate
Diffuser Material	Polycarbonate
Screws & Fixings Material	Clips - Grade 303 Stainless Steel - Not Suitable for High Chlorine or Coastal Environments (see code 10260 for Plastic Clips)

Electrical Information	
Electric Class	Class I

Email: technical@belllighting.co.uk
Telephone: 01924 893380

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Additional Information	
Beam Angle	120°
Power Factor	25W = 0.93 / 33W = 0.95 / 42W = 0.96 / 50W = 0.97
LED Chip	Samsung
Standard Deviation Colour Matching	<3-step MacAdam Ellipse

Email: technical@belllighting.co.uk
Telephone: 01924 893380

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.