Apex Mentor 15/20/24/30W Wattage & CCT Switchable 5ft LED Batten - UGR<19 - 3000/4000/6000K


Part Code: 70441

The Apex CCT LED Batten range is a versatile lighting solution designed to simplify specification, installation, and maintenance. Featuring selectable colour temperatures, Apex provides the flexibility to adapt to a wide range of commercial and industrial environments. A universal accessory system across the range reduces stock requirements, simplifying ordering, and enabling faster installations.




- Suitable for surface mounting
- Apex Universal Plug-In Accessories Available
- Multiple BESA box entry points suitable for through wiring with loop-in-loop-out terminals
- Flicker free driver
- Suitable for educational institutions, healthcare facilities, commercial spaces & storage facilities




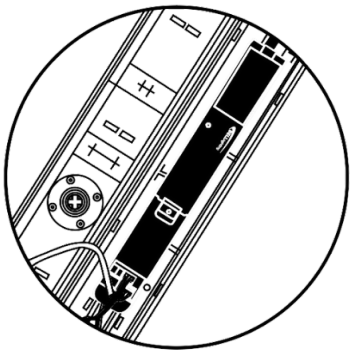

Apex Quick Fix
Optional Emergency Pack

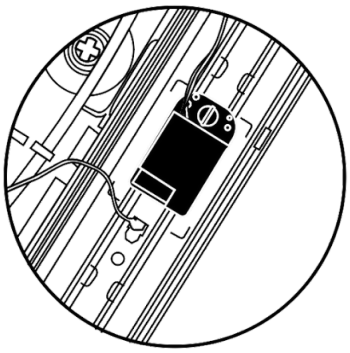

Apex Quick Fix
Optional Microwave Sensor

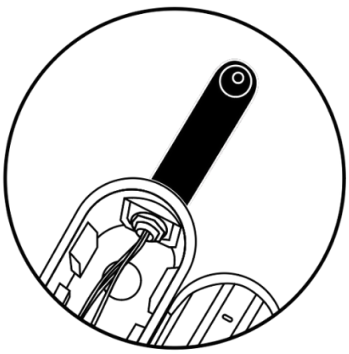

Apex Quick Fix
Optional PIR Sensor

Email: technical@belllighting.co.uk
Telephone: 01924 893380

www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

BELLlighting

Apex



Product Category	Fittings / LED Battens
Application	LED Batten
Product Warranty	8 Years (2 Years On Site)
EAN	5063695042347
Commodity Code	9405423990
Country of Origin	CN

Technical Specification	
Wattage (W)	15/20/24/30
Volts (V)	220/240
Colour Temperature (K)	3000/4000/6000
Lumen Output (lm)	15W = 2063 (3000K) / 2135 (4000K) / 2155 (6000K) - 20W = 2734 (3000K) / 2856 (4000K) / 2863 (6000K) - 24W = 3229 (3000K) / 3391 (4000K) / 3378 (6000K) - 30W = 3828 (3000K) / 4199 (4000K) / 4007 (6000K)
Lumens per Watt (lm/W)	128-144
Candelas	1720
CRI (ra)	90
Frequency (Hz)	50/60
LED Drive Current	270mA
Energy Consumption (kWh/1000h)	30
Life Hours	70000
Switching Cycles	25000
IK Rating	IK08
IP Rating	IP44
Height (mm)	87
Operating Temperature	-20°C - +35°C
Length (mm)	1510
Lumen Maintenance Ratio	L80 B10
Depth (mm)	180
Individual Product Weight (kg)	3.3

Packaging Information	
Minimum Order Quantity	1
Single Box Weight (kg)	3.7
Single Box Height (mm)	90
Single Box Width (mm)	184
Single Box Depth (mm)	1518
Single Box Volume	0.02513808
Outer Box Qty	2
Outer Box Weight (kg)	8.6
Outer Box Height (mm)	207
Outer Box Width (mm)	200
Outer Box Depth (mm)	1540
Outer Box Volume	0.063756
UNSPSC Code	39111541

Email: technical@belllighting.co.uk
Telephone: 01924 893380

www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Construction	
Driver Manufacturer	BELL
Primary Material	Steel
Diffuser Material	Polycarbonate

Electrical Information	
Electric Class	Class II

Installation Information	
Driver Integral?	Yes

Email: technical@belllighting.co.uk
Telephone: 01924 893380
www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Additional Information	
Beam Angle	90°
Power Factor	>0.9
Total Harmonic Distortion	<20%
LED Chip	Samsung
Standard Deviation Colour Matching	<3-step MacAdam Ellipse

Accessories	
70443	Apex Suspension System for Mentor Batten - 1.5m Adjustable

Email: technical@belllighting.co.uk
Telephone: 01924 893380
www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.