Apex Ultra 31/40/49/58W Wattage & CCT Switchable 5ft LED Batten - 3000/4000/6000K


Part Code: 70448

The Apex CCT LED Batten range is a versatile lighting solution designed to simplify specification, installation, and maintenance. Featuring selectable colour temperatures, Apex provides the flexibility to adapt to a wide range of commercial and industrial environments. A universal accessory system across the range reduces stock requirements, simplifying ordering, and enabling faster installations.




- Versatile general-purpose batten
- Apex Universal Plug-In Accessories Available
- Multiple BESA box entry points suitable for through wiring with loop-in-loop-out terminals
- Flicker free driver
- Suitable for educational institutions, healthcare facilities, commercial spaces & storage facilities



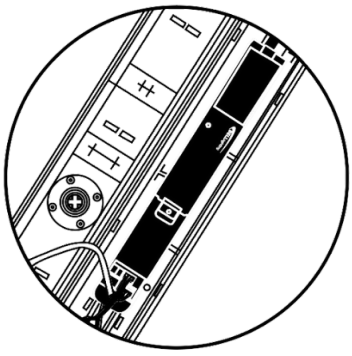

Apex Quick Fix
Optional Emergency Pack

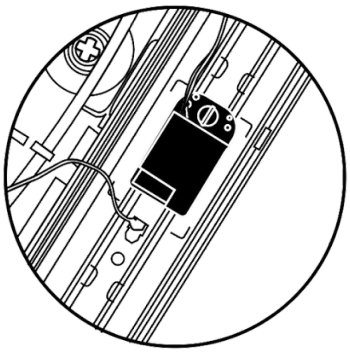

Apex Quick Fix
Optional Microwave
Sensor



Apex Quick Fix
Optional PIR Sensor

Email: technical@belllighting.co.uk
Telephone: 01924 893380

www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

BELLlighting

Apex



Product Category	Fittings / LED Battens
Application	LED Batten
Product Warranty	8 Years (2 Years On Site)
EAN	5063695042415
Commodity Code	9405423990
Country of Origin	CN

Technical Specification	
Wattage (W)	31/40/49/58
Volts (V)	220/240
Colour Temperature (K)	3000/4000/6000
Lumen Output (lm)	31W = 4636 (3000K) / 4938 (4000K) / 4987 (6000K) - 40W = 5774 (3000K) / 6232 (4000K) / 6255 (6000K) - 49W = 7714 (3000K) / 7778 (4000K) / 7680 (6000K) - 58W = 8806 (3000K) / 8685 (4000K) / 8738 (6000K)
Lumens per Watt (lm/W)	144-161
Candelas	2780
CRI (ra)	80
Frequency (Hz)	50/60
LED Drive Current	360mA
Energy Consumption (kWh/1000h)	58
Life Hours	70000
Switching Cycles	25000
IK Rating	IK08
IP Rating	IP20
Height (mm)	68
Operating Temperature	-20°C - +35°C
Length (mm)	1530
Lumen Maintenance Ratio	L80 B10
Depth (mm)	66
Individual Product Weight (kg)	1.54

Packaging Information	
Minimum Order Quantity	1
Single Box Weight (kg)	1.76
Single Box Height (mm)	72
Single Box Width (mm)	72
Single Box Depth (mm)	1540
Single Box Volume	0.00798336
Outer Box Qty	6
Outer Box Weight (kg)	11.4
Outer Box Height (mm)	155
Outer Box Width (mm)	230
Outer Box Depth (mm)	1545
Outer Box Volume	0.05507925
UNSPSC Code	39111541

Email: technical@belllighting.co.uk
Telephone: 01924 893380

www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Construction	
Driver Manufacturer	BELL
Primary Material	Steel
Diffuser Material	Polycarbonate

Electrical Information	
Electric Class	Class II

Installation Information	
Driver Integral?	Yes

Email: technical@belllighting.co.uk
Telephone: 01924 893380
www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Additional Information	
Beam Angle	120°
Power Factor	>0.9
Total Harmonic Distortion	<20%
LED Chip	Samsung
Standard Deviation Colour Matching	<3-step MacAdam Ellipse

Email: technical@belllighting.co.uk
Telephone: 01924 893380
www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.