Apex Ultra 38/48/58/68W Wattage & CCT Switchable 6ft LED Batten - 3000/4000/6000K


Part Code: 70449

The Apex CCT LED Batten range is a versatile lighting solution designed to simplify specification, installation, and maintenance. Featuring selectable colour temperatures, Apex provides the flexibility to adapt to a wide range of commercial and industrial environments. A universal accessory system across the range reduces stock requirements, simplifying ordering, and enabling faster installations.




- Versatile general-purpose batten
- Apex Universal Plug-In Accessories Available
- Multiple BESA box entry points suitable for through wiring with loop-in-loop-out terminals
- Flicker free driver
- Suitable for educational institutions, healthcare facilities, commercial spaces & storage facilities



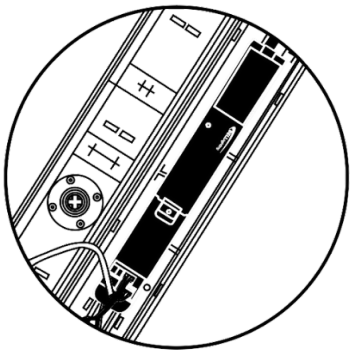

Apex Quick Fix
Optional Emergency Pack

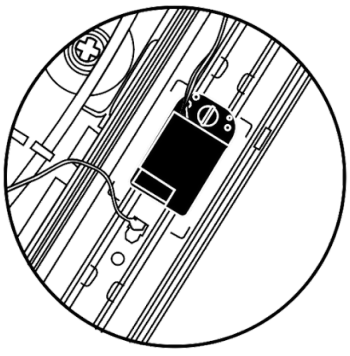

Apex Quick Fix
Optional Microwave Sensor



Apex Quick Fix
Optional PIR Sensor

Email: technical@belllighting.co.uk
Telephone: 01924 893380

www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

BELLlighting

Apex



Product Category	Fittings / LED Battens
Application	LED Batten
Product Warranty	8 Years (2 Years On Site)
EAN	5063695042422
Commodity Code	9405423990
Country of Origin	CN

Technical Specification	
Wattage (W)	38/48/58/68
Volts (V)	220/240
Colour Temperature (K)	3000/4000/6000
Lumen Output (lm)	38W = 5594 (3000K) / 5970 (4000K) / 6023 (6000K) - 48W = 7055 (3000K) / 7626 (4000K) / 7602 (6000K) - 58W = 8299 (3000K) / 9025 (4000K) / 9015 (6000K) - 68W = 9606 (3000K) / 10560 (4000K) / 10186 (6000K)
Lumens per Watt (lm/W)	141-159
Candelas	3430
CRI (ra)	80
Frequency (Hz)	50/60
LED Drive Current	430mA
Energy Consumption (kWh/1000h)	68
Life Hours	70000
Switching Cycles	25000
IK Rating	IK08
IP Rating	IP20
Height (mm)	68
Operating Temperature	-20°C - +35°C
Length (mm)	1830
Lumen Maintenance Ratio	L80 B10
Depth (mm)	66
Individual Product Weight (kg)	1.79

Packaging Information	
Minimum Order Quantity	1
Single Box Weight (kg)	2.06
Single Box Height (mm)	72
Single Box Width (mm)	72
Single Box Depth (mm)	1840
Single Box Volume	0.00953856
Outer Box Qty	4
Outer Box Weight (kg)	9
Outer Box Height (mm)	155
Outer Box Width (mm)	155
Outer Box Depth (mm)	1845
Outer Box Volume	0.044326125
UNSPSC Code	39111541

Email: technical@belllighting.co.uk
Telephone: 01924 893380

www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Construction	
Driver Manufacturer	BELL
Primary Material	Steel
Diffuser Material	Polycarbonate

Electrical Information	
Electric Class	Class II

Installation Information	
Driver Integral?	Yes

Email: technical@belllighting.co.uk
Telephone: 01924 893380
www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.

Additional Information	
Beam Angle	120°
Power Factor	>0.9
Total Harmonic Distortion	<20%
LED Chip	Samsung
Standard Deviation Colour Matching	<3-step MacAdam Ellipse

Email: technical@belllighting.co.uk
Telephone: 01924 893380
www.belllighting.co.uk

The information shown above was correct at time of publication. Please refer to our Terms & Conditions of Sale for further detail.