


Adrina



- High specification linear luminaire suitable for education, commercial and large retail applications
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort (AADRINA5 only)
- Supplied bi-directional light output as standard (directional only option can be selected if required)
- CCT selectable between 3000K and 4000K
- Suitable for individual or continuous surface or suspension mounting
- Dimmable and OCTO options available
- Powered by Tridonic



(AADRINA5 only)



OCTO
Option
Available

Powered by
CASAMBI



AADRINA5 fitted with
AADRINA/SK

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-20°C to 45°C	L80 100,000	80	3	90°	1	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR
AADRINA5	1500mm - CCT Selectable	27W	3000K/4000K	3600lm (4000K)	130lm/W (4000K)	19
AADRINA2X5	1500mm - CCT Selectable HO	50W		6800lm (4000K)		20

* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION
/SM3	Self-Test Emergency
/OCTO	OCTO Smart Control
/DD	Digital Dimming (DD1/DD3/DD4)

CODE (ACCESSORIES)	DESCRIPTION
AADRINA/SK	Adrina Suspension Kit
AADRINA/SMK	Adrina Surface Mounting Kit
AADRINA/600	Adrina Infill 600mm

Adrina

90°
Beam
Angle



ADRINA
AADRINA5



CCT Selectable

Integral CCT switch allows the installer a choice of either 3000K or 4000K colour temperature options




UGR<19 Rated

UGR>19 design reduces glare for users making it ideal for installation into offices, classrooms and retail environments



Surface or Suspended Mounting

Flexible installation with both surface and suspension mounting options available

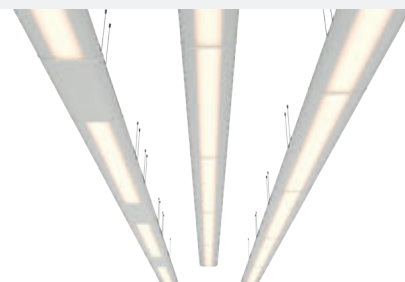

Continuous Suspension

Ideal for large spaces, connect the fittings together to create a seamless row of suspended fittings