




Endurance 1200x600



473

- Edge lit LED panel suitable for education, commercial and ancillary area applications
- Cool white, warm white and daylight options
- White anodised aluminium frame for visual compatibility with ceiling grid
- Surface mounting frame option
- TPa as standard
- **Switch Dim, DALI and 0-10V dimming capability using the multi dimmable driver accessories ADDIM/60/MC (see p215 for more information)**
- **Self-Test Panel Pod and Sensor Pod compatible (see p478 - p479 for more information)**

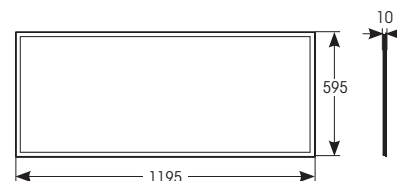

Powered by
CASAMBI



AIRMLED/POD/3NM/ST
Emergency Pod fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-20°C to 40°C	L80 76,000	80	4	110°	2	IP40

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR
AERMLED2/120/CW	1200 x 600 - Cool White	60W	4000K	5400lm	88lm/W	20

* For Warm White variant replace 'CW' with 'WW', and for Daylight product replace 'CW' with 'DL' into the above codes e.g. **AERMLED2/120/WW**

AIRMLED/POD/3NM/ST	Emergency Pod	5W
APOD/1/3NM/DA	Emergency Pod DALI	3W
AIRMLED/POD/MWS	Sensor Pod	

* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION
/WW	Warm White Versions
/DL	Daylight Versions
/OCTO	OCTO Smart Control

CODE (ACCESSORIES)	DESCRIPTION
ASMF120/1	1200x600 Surface Mounting Frame
APRK/120	1200x600 Plasterboard Recessed Kit
ADDIM/60/MC	60W Multi-current Dimmable LED Driver

