



Falcon Pro



- Compact surface ultra-low profile recessed DALI emergency downlight
- Supplied with open area and escape route interchangeable lenses
- High specification optic design and performance allows increased spacing providing reduced cost
- Available in black and white finishes
- DALI emergency as standard
- BESA and side conduit mounting
- If not connected to DALI network Self-test mode operates automatically



Black

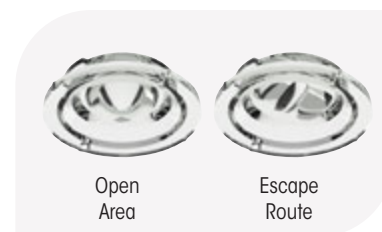

Interchangeable lenses supplied

	Open (Anti-Panic) area (0.5 Lux Minimum) **				
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	3.5	7	3.5	7
	4	4.5	10	4.5	10
	6	3	12	3	12
	2.5	3.5	7	3.5	7
	4	4.5	10	4.5	10
	6	3	12	3	12

	Escape route 2 metres wide (1 Lux minimum) *				
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	-	-	4.2	12
	4	-	-	4.5	16
	2.5	-	-	4.2	12
	4	-	-	4.5	16
	2.5	-	-	4.2	12
	4	-	-	4.5	16

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP	IK
220/240V	50/60Hz	5°C to 50°C	L80 59,000	Open area - 125° / Escape route - 75°/135°	2	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	EMERGENCY MODE
AFLP/1/W/3NM/DA	Non-Maintained	2W	6500K	Open area - 223lm / Escape route - 228lm
AFLP/1/B/3NM/DA	Non-Maintained - Black			Open area - 200lm / Escape route - 204lm

CODE (ACCESSORIES)	DESCRIPTION
ASBP/29/LI	2100mAh Li-FePO4 Replacement Battery

