


Falcon Wall



539

- Ultra-low profile recessed or surface mounted emergency low-level light suitable for most internal and external applications
- Cutting-edge lens design maximises light output and performance, allowing increased spacing reducing cost
- Integral IP65 open area lens ideal for external escape route installations
- Low level installations provide the required LUX levels on the floor reducing the need for ceiling emergency lighting
- Available in black and white finishes
- Self-test and DALI options available

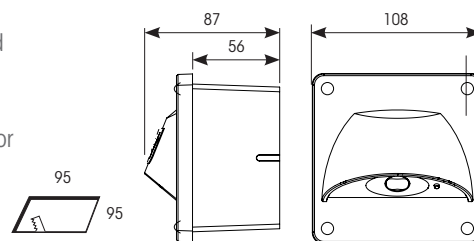

Capable of being surface mounted



IP65 rated lens and IK08 impact rating suitable for external applications



Black

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP	IK
220/240V	50/60Hz	5°C to 40°C	L80 59,000	45°/120°	2	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	EMERGENCY MODE
AFW/1/W/3NM/ST	Non-Maintained - Self-Test White	1.3W	6500K	80lm
AFW/1/B/3NM/ST	Non-Maintained - Self-Test Black			
AFW/1/W/3NM/DA	Non-Maintained - DALI - White			
AFW/1/B/3NM/DA	Non-Maintained - DALI - Black			

CODE (ACCESSORIES)	DESCRIPTION
ASBP/18	3.2V 1500mAh Li-FePO4 Lithium Replacement Battery

