


Unity GC Pro Fixed



- Compact high performance architectural adjustable downlight suitable for residential applications
- Deep cut-off angle for glare control and comfort
- Die-cast aluminium construction, powder coated
- Mirror finished anodized reflector for optimum light control
- Remote driver with plug and play connection

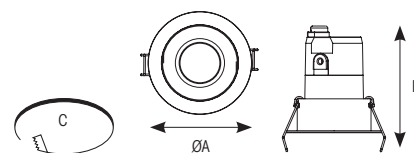

Powered by
CASAMBI



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-20°C to 50°C	L80 56,000	90	6	30°	2	IP44

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	A	B	C
AGCP1/1/CW	Cool White	3W	4000K	140lm	47lm/W	<10	48mm	48mm	39mm
AGCP1/1/WW	Warm White		3000K	130lm	43lm/W	<10	48mm	48mm	39mm
AGCP2/1/CW	Cool White	7W	4000K	310lm	45lm/W	<10	65mm	70mm	55mm
AGCP2/1/WW	Warm White		3000K	280lm	40lm/W	<10	65mm	70mm	55mm
AGCP3/1/CW	Cool White	14W	4000K	780lm	57lm/W	<10	78mm	81mm	68mm
AGCP3/1/WW	Warm White		3000K	720lm	53lm/W	<10	78mm	81mm	68mm

* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION
/OCTO	OCTO Smart Control
/DD	Digital Dimming (DD1/DD3/DD4)

CODE (ACCESSORIES)	DESCRIPTION
ACFLP/3	LED Emergency Lighting Pack *

* (3W and 7W Only)

Sturdy spring clips provide tight and lasting position once installed

Aluminium heatsink for optimum thermal management to ensure long lifetime cycle

Protective spring clip covers for ceiling protection and ease of installation

High quality LED light engine

Mirror finished anodized reflector optimises light distribution providing an excellent and uniform output

Anti-glare diffuser provides visual comfort and optimum light distribution

Specially designed baffle construction with recessed LED module and diffuser provide a steep cut-off angle ensuring maximum glare control and visual comfort

Slim profile matt white bezel provides sleek and modern appearance

