




- Self-test as standard
- Optional hanging blade legends (supplied with self-adhesive legend as standard) for enhanced appearance
- Aesthetically designed for modern appearance
- 20mm side and rear cable entries
- High output LED performance and distribution allows maximum spacing providing reduced cost

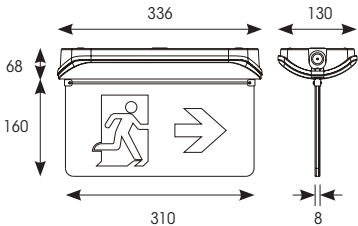

Installed without blade legend

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	0°C to 40°C	L70 50,000	110°	1	IP65

CODE	DESCRIPTION	WATTAGE	CCT	STANDARD MODE	VIEWING DISTANCE
AHARLED/3M/ST	Maintained/Non-Maintained	3W	6500K	130lm	25 metres

CODE (ACCESSORIES)	DESCRIPTION
AHARLED/ALAR	Double Sided Legend - Arrow Left and Right
AHARLED/L/AD	Double Sided Legend - Arrow Down
AHARLED/L/AU	Double Sided Legend - Arrow Up

CODE (ACCESSORIES)	DESCRIPTION
ASBP/5/LI	3.2V 1500mAh Li-FePO4 Replacement Battery

