



Hope Asymmetric Linear

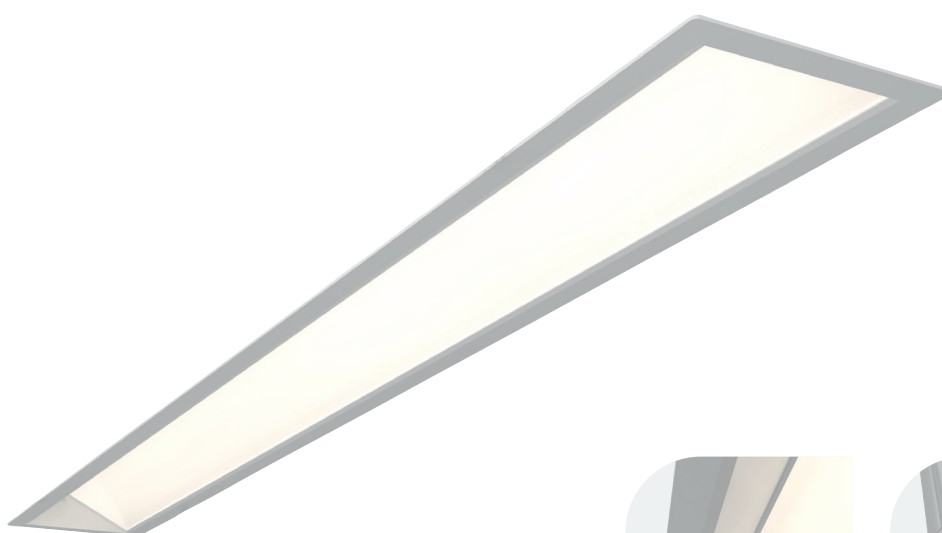

- Anti-Ligature asymmetrical recessed linear suitable for healthcare applications
- CCT selectable between 3000K, 4000K and 5000K and power selectable; offering a choice of 2 outputs, in one luminaire
- Specially designed angled polycarbonate diffuser provides asymmetric light output, directing the light down and outwards, allowing installation into the perimeter or corridor and circulation areas, perfect for healthcare applications
- Integral fixing clips allow for installation into plasterboard ceilings
- High efficiency up to 120lm/w
- Dimmable and Emergency options, standard and Self-Test Emergency available using the Hawk Kit Emergency Pack



Angled diffuser provides asymmetric light output



Special clip design allows for installation into plasterboard ceilings

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-25°C to 50°C	L80 54,000	80	5	75°/110°	2	IP40

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR
AHOPL4/1	1200mm - Selectable CCT	18W-28W	3000/4000/5000K	2200lm - 3300lm (4000K)	120lm/W (4000K)	24

* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION
/SM3	Self-Test Emergency
/DD	Digital Dimming (DD1/DD3/DD4)

CODE (ACCESSORIES)	DESCRIPTION
AHUEMKIT/LI	Maintained/Non-maintained - Universal Emergency Pack

