




Falcon

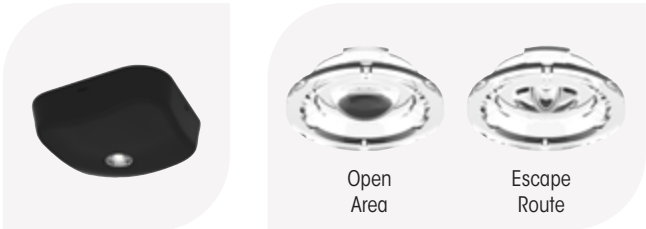


- Compact surface ultra-low profile recessed self-test emergency downlight
- Supplied with open area and escape route interchangeable lenses
- High specification optic design and performance allows increased spacing providing reduced cost
- Available in black and white finishes
- Up to 19.6 metres spacing between luminaires
- Self-test as standard
- BESA mounting option



Black Interchangeable lenses supplied

 Black	Open (Anti-Panic) area (0.5 Lux Minimum) **				
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	2.5	4.5	2.5	4.5
	4	3	7	3	7
	6	3.5	9	3.5	9
	2.5	2.3	4	2.3	4
	4	2.8	6.5	2.8	6.5
	6	3.5	9	3.5	9

 Black	Escape route 2 metres wide (1 Lux minimum) *				
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	-	-	4.2	10.5
	4	-	-	4.25	13
	2.5	-	-	4	9.5
	4	-	-	4	11

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 40°C	L70 50,000	Open area - 96° / Escape route - 135°x17°	1	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	EMERGENCY MODE
AFALED/3NM/ST/IP65	Non-Maintained	3W	6500K	Open area - 153lm Escape route - 145lm
AFALED/3NM/ST/IP65/B	Non-Maintained - Black			

CODE (ACCESSORIES)	DESCRIPTION
ASBP/14/LI	3.2V 3000mAh Li-FePO4 Replacement Battery