

Talana Solar LED


Supplied c/w Integral Driver



- Ultra modern die-cast solar powered aluminium LED bollard
- PIR motion sensor as standard
- 2 operation modes:-
1) 11% output after sunset, motion detected 100% output, no motion 11% for 20 hours
2) Motion detected 100% output, no motion off
- Graphite textured powder coat paint finish
- LED lifespan L70 36,000 hours



Matching
Talana Solar LED Wall Light
see p208

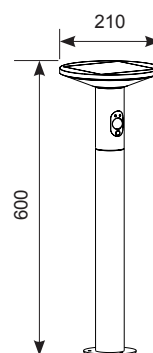

max 10 metres
1 minute
10 to 70 LUX

Code	Lamp	Description
ATASLEDB/60	LED	Cool White

Accessories ASBP/17 7.4V 1500mAh Replacement Li-ION Battery

LED Information

Lumens Delivered	210lm
CRI	Ra 80
CCT	4000K
Operating Temp	-25°C to 55°C

