



Navara LED ST Twin Spot

Emergency Lighting



Data Sheet

Product Information

The Navara Non-Maintained Emergency IP65 LED Twin Spots are ideal for Self-Test Emergency Applications. Suitable for use in several commercial environments such as warehouses and large open spaces both internal and external.

Product Features

- 5 year warranty (3 years on the batteries)
- Class II
- 3W LED Total
- IP20
- 4000K LED
- Self-Test operation
- Non-Maintained
- Supplied with Long life LifePO4 cells
- L70 - 40,000hrs
- Lighting designers can download photometric data from our website

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98103	Navara LED Self-Test Emergency Twin Spot	2x 1.5W	6000K	2 x 190lm	N/A	A	II

Nominal voltage	200~240VAC
Operating frequency	50/60Hz
Circuit Wattage	2x 1.5w including losses
Circuit Current	0.03A
Driver Current Rating	50mA
PFC	0.14
In Rush Current	N/A
Ambient temperature range	0°C to +35°C
IP rating	20


Emergency Parameters

Circuit Wattage	0.4w
Circuit Current	0.14mA
Driver Current Rating	50mA
PFC	0.14
Battery Type	3.2v 4.5Ah LiFePO4

Construction

Body: Polycarbonate
Diffuser: Polycarbonate

Product Dimensions

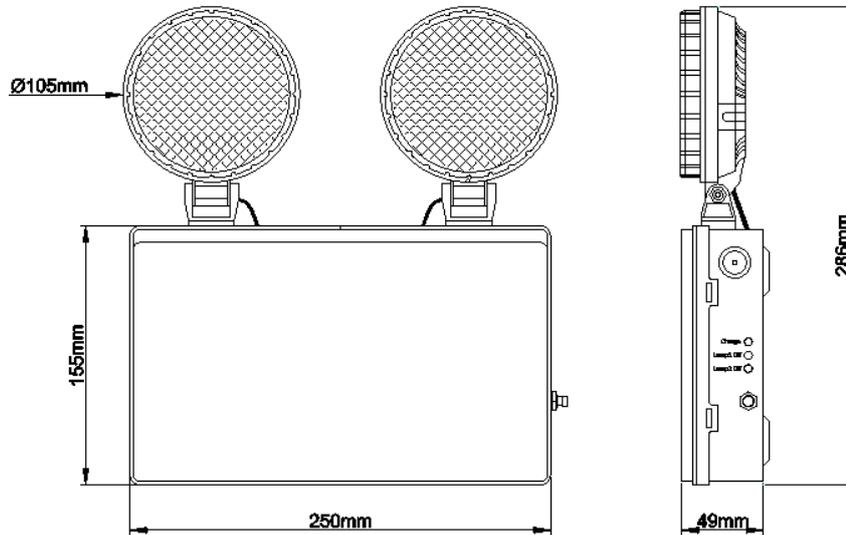

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

www.ksrlighting.com

KSR Navara LED Self-Test Emergency Exit Box – DS-D-24th February 2024