



# Navara LED NM Emergency IP65 ST Twin Spot

*Commercial Lighting*



Data Sheet

## Product Information

The Navara **Non-Maintained Emergency IP65 LED Twin Spots** are ideal for Self-Test Emergency Applications. Suitable for use in several **Commercial environments** such as **Warehouses** and **large open spaces** both **internal** and **external**.

### KSR98132 – In Emergency Mode



## Product Features

- 5-year warranty
- Class I
- IP65
- 4.5W LED
- 6000K
- Self-Test Non-Maintained Operation
- Supplied with Long life LifePO4 cells
- L70 - 40,000hrs
- Lighting designers can download photometric data from our website

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98132	Navara IP65 LED Self-Test Non-Maintained Emergency Twin Spot	4.5W	6000K	380lm Total	N/A	N/A	I


## Emergency Parameters

Nominal voltage	200~240VAC
Operating frequency	50/60Hz
PFC	1.0
Ambient temperature range	0°C to +35°C
IP rating	65
Circuit Wattage	4.5W
PFC	1.0
Battery Type	3.2v 4.5Ah LiFePO4

## Construction

Body: Polycarbonate  
Diffuser: Polycarbonate

# Product Dimensions

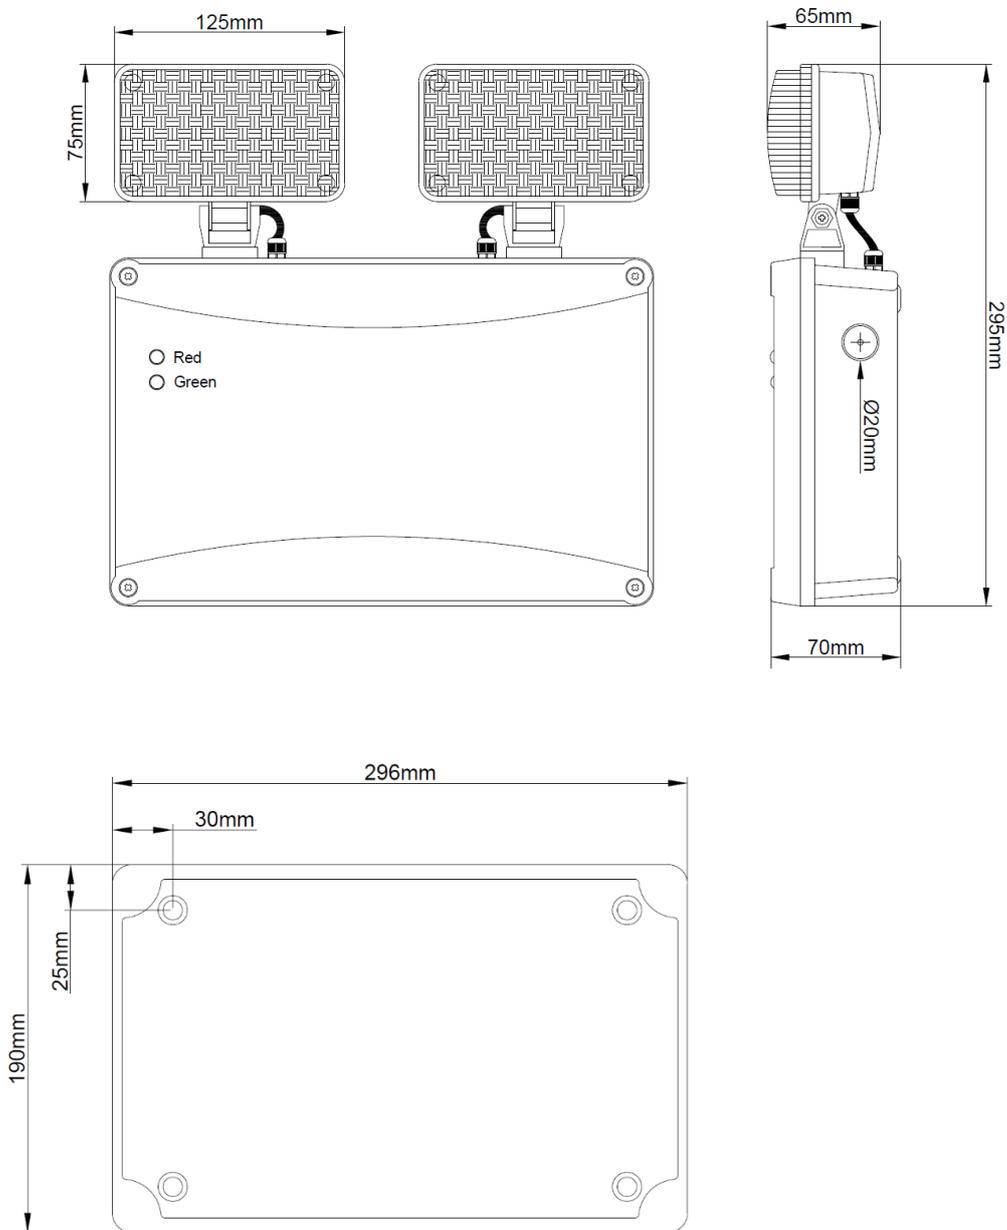

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

[www.ksrlighting.com](http://www.ksrlighting.com)

KSR98132-DS-D-08.01.2025