

FIREBREAK QR SELECT PRO BAFFLE

The Firebreak Qr Select Pro Baffle is another edition to our Firebreak Qr range of fire-rated downlights.

As with other Pro fittings in this range, the Firebreak Qr Pro Baffle comes with the all new Pro Lever Connector, which makes installation quicker and easier. This downlight also has Select technology incorporated, which gives selectable dual outputs and 4 colour temperatures - 2700K, 3000K, 4000K or 6000K. The product is Phase dimmable, as standard, and has been designed to be low glare, with a 49° beam angle.

As you have come to expect from our high quality, trouble free, Firebreak Qr range of downlights, they are IP65 rated, multiple bezel options are available and are backed by our full 5 year warranty.

DUAL PRO	6W	8W	CRI:Ra
2700K	335 Lumens	415 Lumens	81
3000K	350 Lumens	435 Lumens	81
4000K	370 Lumens	475 Lumens	81
6000K	355 Lumens	445 Lumens	81


PRO LEVER CONNECTOR INCLUDED, AS STANDARD



SWITCHABLE COLOUR TEMPERATURE & WATTAGE



INTERCHANGEABLE POLYCARBONATE BEZELS

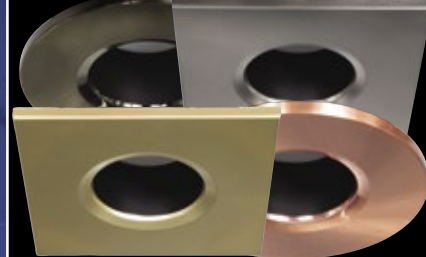

FIREBREAK QR SELECT PRO BAFFLE

DOWNLIGHTS



CODE

DESCRIPTION

KSRFRD387	Firebreak Qr Select Pro Baffle Dual Wattage 4CCT Downlight
-----------	--

FEATURES & BENEFITS

- 5 year Warranty
- Quad CCT dual-Wattage LED
- Set the output of the fitting to 6W or 8W via the drive current selector switch
- Switch between 2700K, 3000K, 4000K & 6000K
- New Pro lever connector included to make installation quicker and easier
- L70 - 54,000 hours
- CRI:Ra>81 | 49° Beam angle
- Phase dimmable as standard - Please see website for recommended dimmers: www.ksrlighting.com
- Can be loosely covered in insulation
- Multiple colour rim options available, in both round and square

COLOUR OPTIONS

White (Supplied)

(Please see pages 44-45 for colour bezel options)

CONSTRUCTION

Body - Polycarbonate/Aluminium
Bezel - Polycarbonate

CLASSIFICATIONS

IP65



DIMENSIONS

Diameter: 85mm
Height: 69mm

72mm



SCAN QR CODE
FOR DATA SHEETS