



Navara LED Self-Test Emergency Bulkhead

Commercial Lighting



Data Sheet

Product Information

The Navara LED **Self-Test Emergency Bulkheads** are ideal for illuminating **Exit Doors, Fire Escapes, Corridors** etc, being multi-functional they can be used as a **Maintained or Non-Maintained** or Emergency bulkhead in both **Internal & External** applications. Supplied complete with full Legend set.

Shown with Recessed Housing & Blade Accessories



Product Features

- 5-year warranty
- Class II
- IP65
- 5W LED
- 6000K
- CRI: Ra86
- Self-test Emergency Operation
- Legends Set included
- Accessories Available
- L70 – 40,000Hrs
- Lighting designers can download photometric data from our website

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98101	Navara Self-Test Emergency Bulkhead	5W	6000	216 (Mains)	86	A+	II
				148 (battery)			
Accessories for KSR98101							
KSR98116	Navara Blade Accessory						
KSR98117	Navara Recessed Bracket Accessory						




Emergency Parameters

Nominal voltage	200~240VAC
Operating frequency	50Hz
Circuit Wattage	4.3W including losses
Circuit Current	0.03A
Driver Current Rating	50mA
PFC	0.14
In Rush Current	N/A
Ambient temperature range	0°C to +35°C
IP rating	65
Circuit Wattage	0.4W
Circuit Current	0.14mA
Driver Current Rating	50mA
PFC	0.14
Battery Type	3.2V 1.5Ah LiFePO4

Construction

Body: Polycarbonate
 Diffuser: Polycarbonate

Product Dimensions

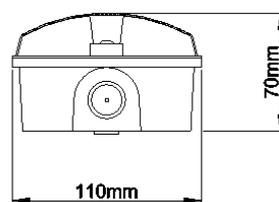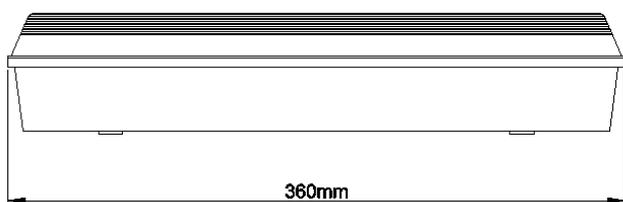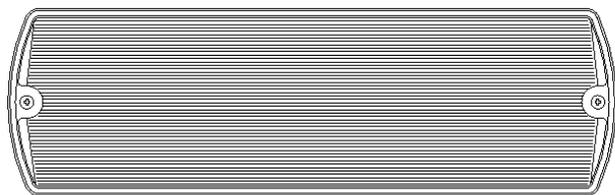

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.